
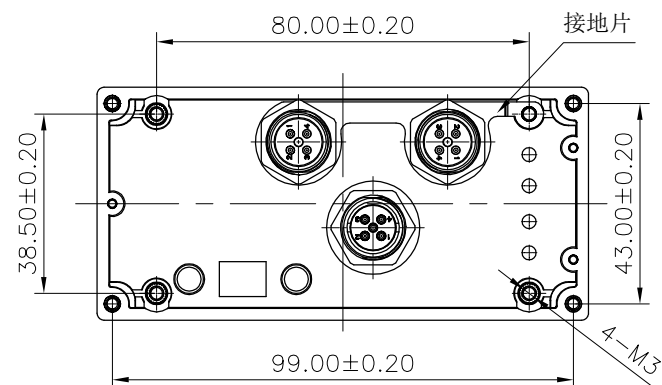


母头防尘盖

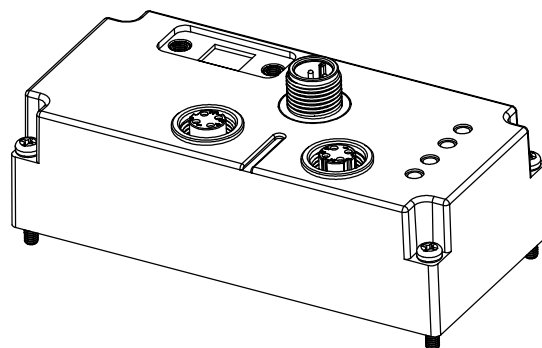

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE

技术参数/Technical specification


• 接插件针数 Number of contacts	4Pin M12 A-Coded /D-Coded
• 额定电流 Rated current	4A
• 额定电压 Rated voltage	250V
• 材料 Material	PC+ABS
• 颜色 Colour	黑色 Black
• 插针材料 Pin Material	铜合金 Copper alloy
• 表面处理 Surface	镀金 Gold plated/3
• 工作温度范围 Limiting temperatures	-40℃~+85℃
• 阻燃等级 Flame retardant grade	UL94-V0

未注公差按DIN ISO 2768-m

Undeclared tolerance according to DIN ISO 2768-v

定制内容: Customized content:

- ① 颜色：默认黑色 Colour: Default black
(可定制其他颜色 Customizable in other colors)
- ② LOGO及印字内容
LOGO and printing content
- ③ 外壳结构和组件 Shell structure and components

DES.	CHEN HK	DATE	2025. 05. 06	单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1	第三视角 / THIRD ANGLE PROJECTION		/版本	A
CHK.	CEN LF	DATE	2025. 05. 06	 慈溪市科发电子有限公司 CIXI KEFA ELECTRONICS CO., LTD								REV	
APP.	HUANG DK	DATE	2025. 05. 06							名称 / TITLE		KF-阀岛控制盒-定制	