

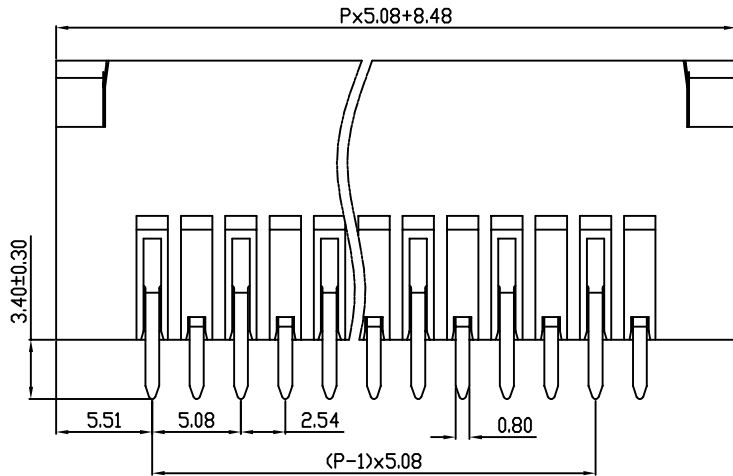
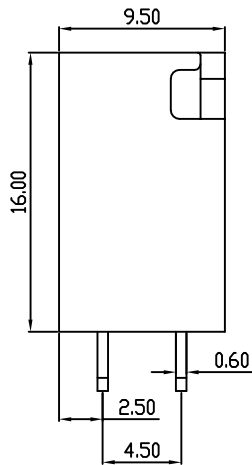
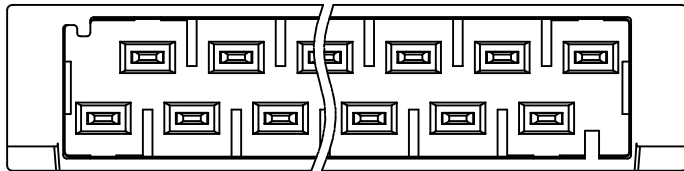


| linear dimension(Tolerances Standard GB/T 14486-2008) |       |              |               |               |                |                 |             | —     |  |  |
|-------------------------------------------------------|-------|--------------|---------------|---------------|----------------|-----------------|-------------|-------|---------------------------------------------------------------------------------|---------------------------------------------------------------------------------|
| variable range                                        | to 6  | over 6 to 10 | over 10 to 30 | over 30 to 60 | over 60 to 100 | over 100 to 160 | over 160 to | to 10 | over 10 to 100                                                                  | over 100 to                                                                     |
| tolerance                                             | ±0.20 | ±0.30        | ±0.50         | ±0.70         | ±1.00          | ±1.30           | ±1.60       | 0.10  | 0.30                                                                            | 0.60                                                                            |

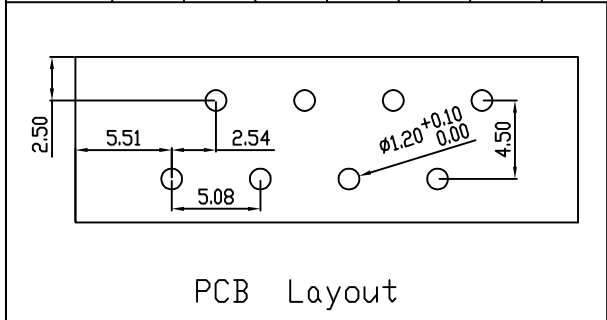

| REVISION RECORD |             |         |          |          |
|-----------------|-------------|---------|----------|----------|
| REV.            | DESCRIPTION | ECN No. | APPROVED | DATE     |
| A               | 新发行         |         | CLF      | 23.03.14 |
|                 |             |         |          |          |
|                 |             |         |          |          |
|                 |             |         |          |          |

| UL/CUL 技术 参数             |                                 |                  |     |     |
|--------------------------|---------------------------------|------------------|-----|-----|
| UL/CUL Technical Data    |                                 |                  |     |     |
| 等 级                      |                                 | B                | C   | D   |
| 额定电压                     | Rated Voltage [V]               | 300              | -   | 300 |
| 额定电流                     | Rated Current [A]               | 8                | -   | 8   |
| 接线范围                     | Wire Range                      | -                |     |     |
| 单/多芯线                    | Solid/Stranded [AWG]            |                  |     |     |
| 耐电压 Withstanding Voltage |                                 | AC1600V/1Min     |     |     |
| IEC 技术参数                 |                                 |                  |     |     |
| IEC Technical Data       |                                 |                  |     |     |
| 过电压类别                    | Overvoltage Category            | III              | III | II  |
| 污染等级                     | Contamination Class             | 3                | 2   | 2   |
| 额定电压                     | Rated Voltage [V]               | 200              | 320 | 320 |
| 额定电流                     | Rated Current [A]               | 14               | 14  | 14  |
| 额定冲击电压                   | Impulse withstand voltagea [KV] | 4                | 4   | 4   |
| 导线截面积                    | Conductor cross section         | -                |     |     |
| 硬质/柔性导线                  | Solid/ flexible [mm²]           |                  |     |     |
| 材 料 Material             |                                 |                  |     |     |
| 绝缘材料                     | Insulation Material             | PA46             |     |     |
| 阻燃等级                     | Imflammability                  | UL94V-0          |     |     |
| 导体材料                     | Contactior Material             | 铜合金 Copper alloy |     |     |
| 导体表面镀层                   | Contactive Coating              | 镀锡 Tin Plated    |     |     |
| 一般参数 Other Data          |                                 |                  |     |     |
| 间距 Pitch                 | [mm]                            | 5.08             |     |     |
| 极数 Poles                 | [P]                             | 2x(02-20)        |     |     |
| 剥线长度                     | Stripping Length [mm]           | -                |     |     |
| 螺丝 Screw/扭矩 Torque(Max)  | [N.m]                           | -                |     |     |
| 工作温度                     | Operating temperatur [°C]       | -40~+120         |     |     |
| 引针尺寸                     | Pin Dimensions [mm]             | 2.60             |     |     |
| PCB板孔径                   | PCB Hole Diameter [mm]          | 1.20             |     |     |

|      |     |      |          |
|------|-----|------|----------|
| DES. | SJD | DATE | 23.03.14 |
| CHK. | BY  | DATE | 23.03.14 |
| APP. | CLF | DATE | 23.03.14 |

|                                                                                                                                    |    |           |    |            |     |                               |                |   |
|------------------------------------------------------------------------------------------------------------------------------------|----|-----------|----|------------|-----|-------------------------------|----------------|---|
| 单位 / UNITS                                                                                                                         | mm | 尺寸 / SIZE | A4 | 比例 / SCALE | 1:1 | 第三视角 / THIRD ANGLE PROJECTION | 版本 / REV       | A |
|  慈溪市科发电子有限公司<br>CIXI KEFA ELECTRONIC CO., LTD |    |           |    |            |     | 名称 / TITLE                    | KF2EDGLVG-5.08 |   |