

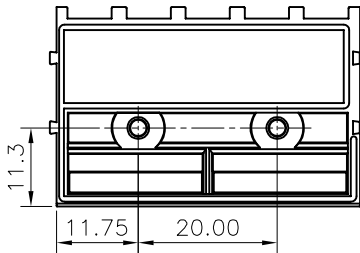

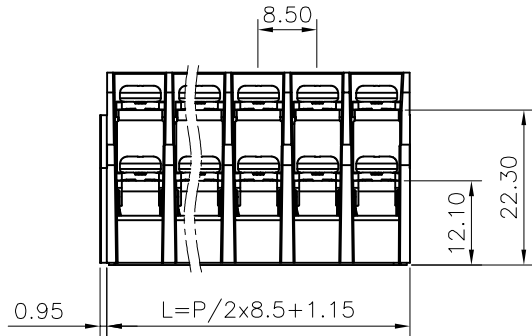
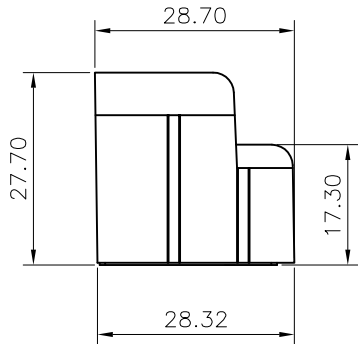



linear dimension(Tolerances Standard GB/T 14486-2008)								—	∇	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60



底部视图5P



底部视图3P



底部视图2P

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		CSX	25.11.03

UL/CUL 技术参数

UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	/	300
额定电流 Rated Current [A]	15	/	10
接线范围 Wire Range	22-14		
单/多芯线 Solid/Stranded [AWG]			
耐电压 Withstanding Voltage	AC1600V/ 1 min		

IEC 技术参数

IEC Technical Data

额定电压 Rated Voltage [V]	630(II/2), 320(III/2), 250(III/3)
额定电流 Rated Current [A]	24
耐电压 Withstanding Voltage	AC3000V/ 1 min
导线截面积 Conductor cross section	0.2-2.5
硬质/柔性导线 Solid/ flexible [mm²]	

材料 Material

绝缘材料 Insulation Material	ABS
阻燃等级 Imflammability	UL94V-0
导体材料 Contactor Material	铜合金 Copper alloy
导体表面镀层 Contactive Coating	镀镍 Ni Plated

一般参数 Other Data

间距 Pitch [mm]	8.5
极数 Poles [P]	2*2P, 2*3P, 2*5P
剥线长度 Stripping Length [mm]	10
螺丝 Screw/扭矩 Torque(Max) [N.m]	0.8
工作温度 Operating temperatur [°C]	-40°C~ +80°C
引针尺寸 Pin Dimensions [mm]	/
PCB板孔径 PCB Hole Diameter [mm]	/
安装类型 Mounting type	面板安装 Panel mounting

DES.	FGG	DATE	25.11.03
CHK.	LZH	DATE	25.11.03
APP.	CSX	DATE	25.11.03

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1	第三视角 / THIRD ANGLE PROJECTION	版本 / REV	A
						名称 / TITLE	KF43-8.5	



慈溪市科发电子有限公司
CIXI KEFA ELECTRONIC CO., LTD