
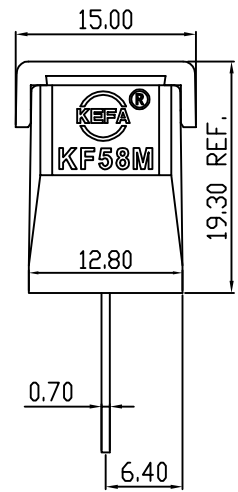
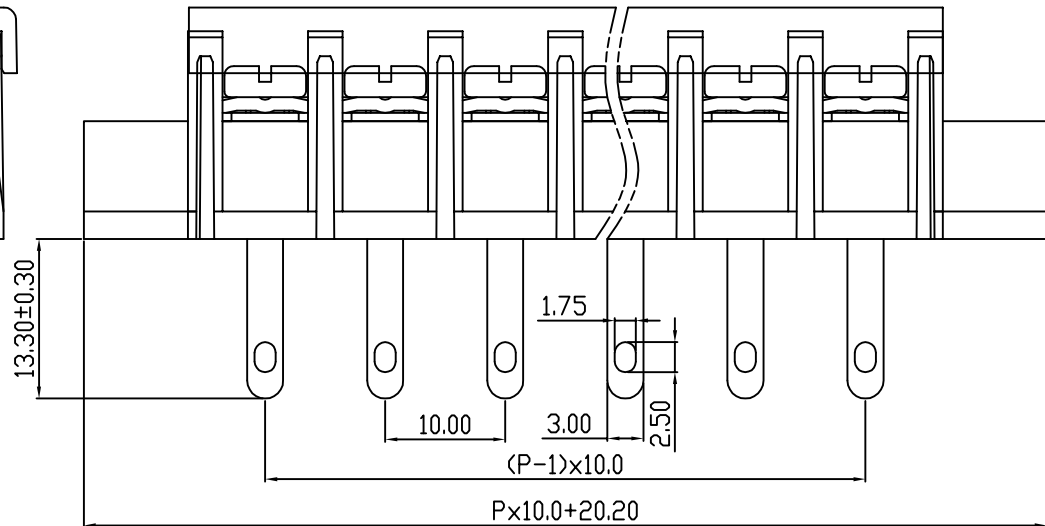
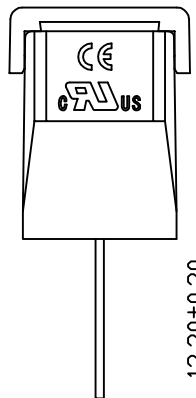
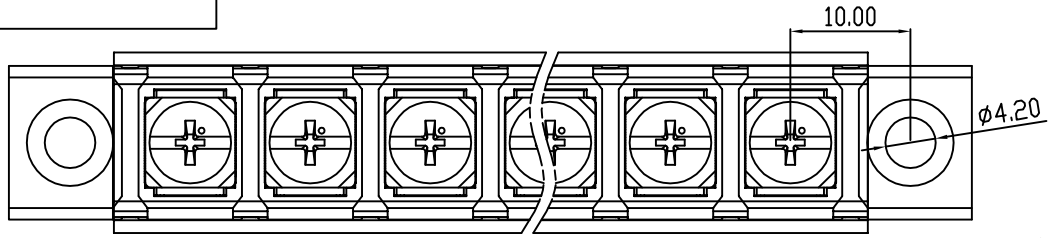


linear dimension(Tolerances Standard GB/T 14486-2008)								— ▯ ⊥		
variable range	to	over	over	over	over	over	over	to	over	over
	6	6 to 10	10 to 30	30 to 60	60 to 100	100 to 160	160 to		10 to 100	100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

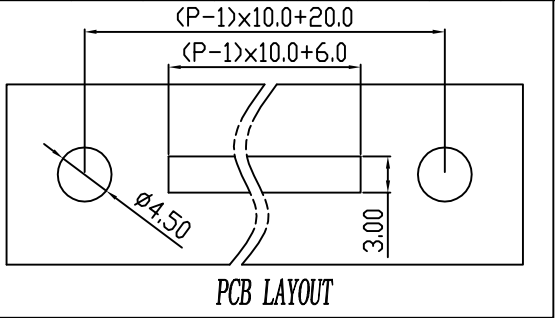

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		CLF	21.09.28

UL/CUL 技术参数		UL/CUL Technical Data					
等级	Use Group						
额定电压	Rated Voltage [V]	300	-	-			
额定电流	Rated Current [A]	20	-	-			
接线范围	Wire Range						
单/多芯线	Solid/Stranded [AWG]				22-12		
IEC 技术参数		IEC Technical Data					
额定电压	Rated Voltage [V]						
额定电流	Rated Current [A]	32					
耐电压	Withstanding Voltage	3000V/1Min					
导线截面积	Conductor cross section				4.0		
硬质/柔性导线	Solid/flexible [mm ²]						
材料		Material					
绝缘材料	Insulation Material	PA66					
阻燃等级	Imflammability	UL94V-0					
导体材料	Contacting Material	铜合金 Copper alloy					
导体表面镀层	Contactive Coating	镀锡 Tin plated					
一般参数		Other Data					
间距	Pitch [mm]	10.0					
极数	Poles [P]	02-24					
剥线长度	Stripping Length [mm]	-					
螺丝	Screw/扭矩 Torque(Max) [N.m]	M4/1.0					
工作温度	Operating temperatur [°C]	-40~+105					
引针尺寸	Pin Dimensions [mm]	13.3					
PCB板孔径	PCB Hole Diameter [mm]	-					

DES.	LQQ	DATE	21.09.28	单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	1:1	第三视角/THIRD ANGLE PROJECTION	版本/REV	A
CHK.	BY	DATE	21.09.28	慈溪市科发电子有限公司 CIXI KEFA ELECTRONIC CO., LTD	名称/TITLE		KF58HM-10.0					
APP.	CLF	DATE	21.09.28		名称/TITLE		KF58HM-10.0					